



**Residential and Commercial  
Walk Mowers, Lawn Tractors & Zero Turns**



**BRIGGS & STRATTON  
CORPORATION**



# Easy to Use. Easy to Own.

Snapper® mowers take practical, innovative features and integrate them into a straightforward design that's easy to use and easy to own. It's that simple.



## Get More Work Done

With integrated cargo beds (select models) and other time-saving innovations, Snapper mowers are built to help you get the job done.



## Straightforward Design

With a straightforward approach Snapper mowers are built to be intuitive, durable, and easy-to-use which empowers you to get more work done.



## Dependable Productivity

Snapper mowers feature durable, dependable components like Hydro-Gear® transaxles, Briggs & Stratton® and Kawasaki® engines and long lasting steel mower decks to keep your mower cutting for years to come.



## Innovating Classics

Innovations like the Snapper Quiet Series Lawn Mower are 50% quieter\* than a standard gas mower.



# Genuine. Professional.

**Powerful, Practical, and Productive.** Snapper Pro® Mowers are where innovation meets common sense practicality to keep you mowing season after season. With powerful engine choices, heavy-duty components and technology, like the iCD™ Cutting System, Snapper Pro mowers are the smart choice for your landscaping needs.



## It's All About the Cut

The iCD Cutting System was engineered to produce the best possible cut in a multitude of conditions. Every component works together to achieve superior cut quality.



## Designed for Professionals

Our commercial engineering team is experienced and focused on developing equipment that withstands the daily rigors of professional cutters.



## Enhance Your Productivity

Mower attachments are essential for when you have a lot of yard work to do. An added collection system, mulch kit, LED light kit or any of the several compatible attachments are likely to make jobs easier and you more productive.



## 500 Hours Between Oil Changes

The Oil Guard™ system offers major productivity gains by allowing landscape contractors to operate their mower for 500 hours between oil changes. Increasing the oil change interval by 5x means less time spent changing the oil and more time cutting.

## Buy a Snapper. Get a Dealer.

Whether you need help picking out the right product or finding the right spark plug, our dealership will provide you the expert product advice and factory-trained service. You can count on us to help you get the right product for your needs and keep it running smoothly for years to come. We offer expert advice and instruction, product selection, test drives, assembly and delivery, service and parts, seasonal maintenance and more.

# Snapper Dealer Advantage.



# Top Reasons To Choose A Snapper Dealer



## Snapper Dealers Are Mower Experts

Dedicated and trained professionals who really understand the Snapper products will give you the ultimate experience you deserve.



## Try It Out

Test drive your new mower to learn how to operate it.



## Hassle-Free Purchase

Your Snapper Dealer can get you started with your new mower including set-up and delivery.



## Service Support When You Need It

Factory-trained service technicians and a stocked parts department will keep you mowing for years to come.



# Quiet Series



## Quiet Power Technology®

This engine is up to 50% quieter<sup>1</sup> so you can hear what is going on around you and take care of yard work earlier in the day or later in the evening.



## Variable Drive Systems

With push, single speed and variable speed self-propelled options, the Quiet Series has the power to help you get the job done. Features vary by model.



## ReadyStart® Technology

No prime. No choke. No worries. Just pull for power (model specific).



## Just Check & Add™

No oil changes.<sup>2</sup> Simply check your oil levels and add as you go. Engine maintenance has never been so simple (model specific).



## Height-of-Cut

A single point lever easily changes seven height-of-cut adjustment positions from 1.25 to 3.75 inches.



## InStart®

InStart technology eliminates the need to pull a cord. Starting your gas engine is as easy as pushing a button (model specific).

**21725Q**  
7.25 ft-lbs Gross Torque\*  
163cc

Briggs & Stratton 725EXi Series™  
3-in-1 System  
Push  
ReadyStart®

**P21725Q**  
7.25 ft-lbs Gross Torque\*  
163cc

Briggs & Stratton 725EXi Series  
3-in-1 System  
Single Speed Self Propel  
ReadyStart

**P21850Q**  
8.50 ft-lbs Gross Torque\*  
190cc

Briggs & Stratton Professional Series™-QPT  
3-in-1 System  
Variable Speed Self Propel  
ReadyStart

**P21850QES**  
8.50 ft-lbs Gross Torque\*  
190cc

Briggs & Stratton Professional Series-QPT  
3-in-1 System  
Variable Speed Self Propel  
InStart

\*All power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton.

<sup>1</sup> Compared to traditional gas mowers. Sound levels vary by application.

<sup>2</sup> Regular maintenance still required. To see complete details refer to your Operator's Manual. Briggs & Stratton standard warranty terms and conditions apply.

<sup>3</sup> See [www.briggsandstratton.com](http://www.briggsandstratton.com) for complete details.

Quiet Power Technology is designed to cut sound pollution by up to 50%<sup>1</sup>. We've worked hard to design a system that allows you to get the job done earlier in the morning or later in the evening without disturbing your neighbors. Paired with Briggs & Stratton's ReadyStart technology that delivers on our Starting Promise,<sup>TM3</sup> this mower takes the work out of yard work.

This line of walk lawn mowers features a 3-in-1 system, allowing you to bag, mulch, or side discharge based on your preference. The single-point height of cut adjustment is a simple, fast and easy way to select your desired lawn height.

# Quiet Power Technology.



# HI VAC<sup>®</sup> and NINJA<sup>®</sup> Series

HI VAC Series




NINJA Series



## HI VAC Mower Deck

The HI VAC Mower Deck is made of deep-drawn heavy-gauge steel with a rolled bottom edge which creates vacuum-like suction to pick up grass clippings off of your lawn with ease.

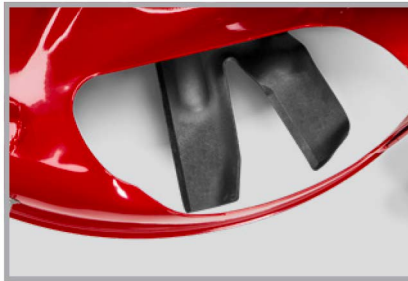

## NINJA Mulching System

The NINJA Walk Mower's powerful blade with six cutting surfaces finely mulches grass clippings while the deck blows them back into your yard.



## Grass Gripper

Rear-wheel drive improves mower traction. The smooth-turn differential helps ensure easy maneuverability without damaging your grass.



## Dependable Power

Briggs & Stratton has delivered power to mowers for decades. Available electric start and standard ReadyStart are just a few of our industry-leading features. Includes a cast-iron sleeve for longer life.



## Available Electric Start

Convenient key electric start for easy starting every time. (P2185020E)

**2185020**  
21" HI VAC, Push  
8.50 ft-lbs Gross Torque\*  
190cc

**P2185020**  
21" HI VAC, RWD  
8.50 ft-lbs Gross Torque\*  
190cc

**P2185020E**  
21" HI VAC, RWD  
8.50 ft-lbs Gross Torque\*  
190cc

**RP2185020**  
21" NINJA, RWD  
8.50 ft-lbs Gross Torque\*  
190cc

Briggs & Stratton Professional Series™ OHV Engine

Bagger included. Mulching Kit and Side Discharge Optional

Briggs & Stratton Professional Series OHV Engine

Bagger included. Mulching Kit and Side Discharge Optional

Self-Propelled Rear-Wheel Drive

Briggs & Stratton Professional Series OHV Engine With Electric Start

Bagger, Mulching Kit and Side Discharge Included

Self-Propelled Rear-Wheel Drive

Briggs & Stratton Professional Series OHV Engine

Mulching Kit and Side Discharge Included, Bagger Optional

Self-Propelled Rear-Wheel Drive



HI VAC

NINJA

# Commercial Series



## Premium Power

The Briggs & Stratton Professional Series OHV engine delivers professional-grade features including easier starting, smoother and quieter operation, increased durability and a spin-on oil filter for longer life.



## High Performance Power

Honda® answers the demands for rugged applications with the GXV160 OHV engine.



## Easier to Maneuver

The smooth-turn differential helps ensure easy maneuverability without damaging your grass. The rear-wheel drive helps improve mower traction uneven terrain.



## Commercial-Grade Features

Whether you're cutting five lawns in a day or just one, the heavy-duty 14-gauge steel mowing deck, reinforced bracing, steel axle and wheels stand up to the task — no matter how tough the job.



## Rugged Durability

Rugged steel wheels with ball-bearings provide durability all season long.

**CRP218520**  
21" NINJA, RWD  
8.50 ft-lbs Gross Torque\*  
190cc

Briggs & Stratton Professional Series OHV Engine  
NINJA Mulching Kit Included. Bagger and Side Discharge Optional.  
Self-Propelled Rear-Wheel Drive, Disc Drive Transmission

**CP215520HV**  
21" HI VAC, RWD  
7.1 ft-lbs Net Torque\*\*  
163cc

Honda† GXV160 OHV Engine  
HI VAC Bagger included. Mulching Kit and Side Discharge Optional.  
Self-Propelled Rear-Wheel Drive, Disc Drive Transmission

\*All power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton.  
\*\*Power rated by engine manufacturer.  
† Honda is a trademark of Honda Motor Company.  
For a full list of specifications, please see page 39.

# SW15

## PROFESSIONAL

The SW15 provides a 32" deck for access into small areas and backyard gates. A hydrostatic transmission provides forward and reverse travel directions for enhanced maneuverability – making this an instant favorite for your crew.



2-Year Limited Warranty†

# Enhanced Maneuverability.

| MODEL   | ENGINE (Gross Horsepower/Displacement) | DECK |
|---------|--|------|
| 5901863 | Honda GXV390 (10.2*/389cc)             | 32"  |
| 5901864 | Honda GXV390 (10.2*/389cc)             | 32"  |

\* Power rated by engine manufacturer.

† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Refer to the engine operator's manual for engine warranty details.

## ENGINE

- Powered by Honda® GXV390 engine

## DRIVE SYSTEM

- Peerless axle with differential chain driven by Hydro-Gear® RT-310 pump and motor
- Flat-free front tires with fixed wheel (5901863) or lockable caster wheel (5901864) configurations
- Ground speed up to 4 mph forward and 2 mph in reverse

## MOWER DECK

- Available in 32" cutting widths
- Compact fully-commercial, fabricated, reinforced steel deck
- Dual timed cutting blades
- Aluminum, greaseable spindles
- Cut height: 1.5"- 5" with spring-assisted, single adjustment point lever

## CHASSIS

- 13 x 5-6 drive tires

## CONTROLS

- Comfortable, single-handed operation with adjustable speed control
- Handlebars are adjustable with four positions for operator comfort

## FUEL SYSTEM

- 0.55-gallon fuel tank

## OPERATOR CONVENIENCE

- Easy to use forward and reverse lever
- Convenient throttle location

## ACCESSORIES

- Cloth Bagger



Variable Hydro-static Drive.



One hand operation with ergonomic travel direction controls and starting.



A commercial-grade, steel timed mower deck has dual timed cutting blades.



Easy cut height adjustment is set with a spring-assisted, single adjustment point lever.



SW15 shown with lockable front caster wheels.

SW25 shown with  
CC Controls.

# SW25

## PROFESSIONAL

Snapper Pro Walk-Behind Mowers will keep you mowing even under the most demanding conditions. Whether shuttling between jobs or maneuvering around obstacles, this walk-behind is a heavy-duty performer in an efficient package.

2-Year Limited Warranty †



# Compact Performance.

| MODEL   | ENGINE (Gross Horsepower/Displacement)       | CONTROLS | DECK |
|---------|--|----------|------|
| 5901497 | Kawasaki FS600V Electric Start (18.5"/603cc) | Standard | 48"  |
| 5901436 | Kawasaki FS600V Electric Start (18.5"/603cc) | CC       | 36"  |
| 5901498 | Kawasaki FS600V Electric Start (18.5"/603cc) | CC       | 48"  |

\* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Refer to the engine operator's manual for engine warranty details.

## ENGINE

- Powered by Kawasaki® FS engine
- Electric and manual start available

## DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3100® Transaxles feature 7" cooling fans that assist with repelling debris
- Dual hydro fluid reservoirs and hydro filters
- Heavy-duty transmission guards reduce build up of debris to improve air flow and allow for access to the filter for maintenance
- Flat-free caster tires
- Ground speed up to 6 mph

## MOWER DECK

- Available in 36" or 48" cutting widths
- Optimized fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge on 36" models
- Cast-aluminum spindles
- Cut height: 1.5" - 4.5"; finite adjustment using pin style height of cut
- Debris shields on idler pulleys extend bearing life

## CHASSIS

- Heavy-duty 1.5" x 2" 11-gauge frame rails, one piece frame
- Dedicated tie-down points, located in the front and rear, makes securing equipment convenient
- 20 x 7-10 drive tires

## CONTROLS

- CC Centralized Controls or standard control options available

## FUEL SYSTEM

- Rugged 5-gallon fuel tank
- Top-mounted fuel pick-up with Viton® Seals

## OPERATOR CONVENIENCE

- Centralized foot control for neutral position
- Easy-to-reach cruise control bar
- Comfortable easy-to-use operator controls
- Momentary PTO switch allows the operator to stop the mower blades while the engine continues to run - simply step on the foot pedal or pull the Cruise Control bar and release the controls

## ACCESSORIES

- Fabric grass catcher, metal grass catcher, mulch kit, professional stripe kit (48"), weight kit



Adjust the mower's speed without removing your hands from the control handles with the improved, ready-access cruise control bar. A convenient speed indicator is placed within direct view on the control panel.



Brake handle is conveniently located beside the control panel, providing instant access with minimal operator effort to engage.



Foot pedal for neutral position provides the operator with more natural control. The neutral position is identified on the speed indicator on the dash.



Need to walk away from the mower to move an obstacle or debris? The new PTO switch allows the operator to stop the mower blades in a single step - simply put the machine in neutral and release the controls. The blades will disengage while the engine continues to run.

SW25 shown with standard controls.





SW35 shown with standard controls.

# SW35

## PROFESSIONAL

The SW35 delivers reliable cutting performance in diverse conditions. Built to run sunrise to sundown, this walk-behind is a productive performer for any size mowing crew.

**2-Year Limited Warranty†**



Robust 1/4" steel engine deck construction provides mounting area for sulky attachments.



Deck drive belt system is designed to provide even belt tension which improves the life of the belt and reduces maintenance.



Reliably set your speed with the improved easy-to-reach cruise control bar featuring a speed indicator. Conveniently located brake handle.



Set cutting height in one easy step using the quick-adjust crank.

### ENGINE

- Powerful Kawasaki® FX651V engine
- Electric start standard
- Two-stage industrial remote air-cleaner
- Easy-to-use oil drain

### DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3100 Transaxles feature 7" cooling fans that assist with repelling debris
- Dual hydro fluid reservoirs and hydro filters
- Narrow transmission guards reduce build up of debris to improve air flow and allow for access to the filter for maintenance
- Flat-free caster tires
- Ground speed up to 7 mph

### MOWER DECK

- Larger discharge opening for improved dispersing of grass clippings
- Available in 48", 52" or 61" cutting widths
- Fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge
- Aluminum spindles with greaseable bearings for longer usable life, 1" shaft with top access grease fitting, 6-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly
- The mower deck mounting system provides easier deck leveling, improved flexibility over terrain, and more durable wear points for reduced maintenance
- Cut height: 1.5"- 4.75", with infinite positioning using the quick-adjust crank
- Debris shields on idler pulleys extend bearing life

### CHASSIS

- Heavy-duty 1.5" x 2" 11-gauge frame rails
- Dedicated tie-down points, located in the front and rear, makes securing equipment convenient

### CONTROLS

- CC™ Centralized Controls or standard control options available

### FUEL SYSTEM

- Rugged 5-gallon fuel tank
- Top-mounted fuel pick-up with Viton Seals

### OPERATOR CONVENIENCE

- Centralized foot control for neutral position
- Easy-to-reach cruise control bar
- Comfortable easy-to-use operator controls
- Momentary PTO switch allows the operator to stop the mower blades while the engine continues to run. Simply put the machine in neutral and release the controls

### ACCESSORIES

- Fabric grass catcher, metal grass catcher, mulch kit, LED light kit, professional stripe kit, weight kit

† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Refer to the engine operator's manual for engine warranty details.

| MODEL   | ENGINE (Gross Horsepower/Displacement) | CONTROLS | DECK |
|---------|--|----------|------|
| 5901317 | Kawasaki FX651V (20.5"/726cc)          | Standard | 48"  |
| 5901316 | Kawasaki FX651V (20.5"/726cc)          | Standard | 52"  |
| 5901261 | Kawasaki FX651V (20.5"/726cc)          | CC       | 48"  |
| 5901231 | Kawasaki FX651V (20.5"/726cc)          | CC       | 52"  |
| 5901232 | Kawasaki FX730V (23.5"/726cc)          | Standard | 61"  |

\* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

# Smooth Operators.

The design of the CC Centralized Controls places the operator's hands in the ideal position to access all in-demand controls. Ergonomic operator presence, steering and reverse levers on both handles operate with a light touch to reduce operator fatigue.





# Rear Engine Rider




## Tried and True

Some dependable designs are ingeniously simple. Snapper's disc drive transmission uses a spinning plate to power a moveable rubber disc.



## HI VAC Mower Deck

Similar to a vacuum, the HI VAC mower deck efficiently cuts and vacuums up grass clippings for a clean finish. The unique blade and rolled deck edge generates a large volume of air and creates suction.



## Optional NINJA Mulching Blade

Finely mulch your grass with our exclusive NINJA Blade that features six powerful cutting surfaces. While the blade mulches the grass clippings, the deck design blows them back into the lawn.



## Getting Started

Briggs & Stratton engines offer the reliability you can count on when mowing the lawn.



## Easy-to-Use Design

After over 50 years of proven performance, the rear engine rider has been engineered to maintain tried and true features that the Snapper brand is known for. An easy-to-use design with enhanced features still delivers the same dependability you would expect from a mowing icon.



## Vertical Stand-On-Edge Capability

Take up less room in storage and make deck maintenance simple by taking advantage of the vertical stand-on-edge capability.

**2691525**  
28" Deck  
11.5 Gross HP\*

344cc Briggs & Stratton  
Intek™ Engine

HI VAC Mower Deck

Articulating Frame with  
Disc Drive Transmission

**2691526**  
33" Deck  
15.5 Gross HP\*

500cc Briggs & Stratton  
Intek Engine

HI VAC Mower Deck

Articulating Frame with  
Disc Drive Transmission

\*All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton. For a full list of specifications, please see page 40. Attachment listing, please see page 34.



**See What Snapper Owners Are Saying:**

**★★★★★ 5 out of 5 stars**

**Small footprint in my garage, GREAT job on my lawn!**

“LOVE the handling, speed range (especially with notched shift plate), easy change from side chute to mulch, and small storage space needed in my garage. Best rider I've owned for my  $\frac{1}{3}$  acre yard.” -*Snapper John*

To read more customer reviews like this visit [www.snapper.com](http://www.snapper.com)

# An American Classic Reborn.



# SPX™ Series



### Step Up to High Value

Steel construction including the hood, cast-iron front axle and a hydrostatic transmission are hallmarks of SPX Tractors. The now standard steel front bumper provides added durability.



### Quick-Adjust Cutting Height

Easy-to-use height-of-cut controls adjust the mower deck for changing grass conditions.



### Fabricated Mower Decks

The durable 42" and 48" fabricated mower decks feature welded, heavy-duty steel for non-stop mowing season-after-season. All fabricated decks come with a limited lifetime warranty!




### Step On It

Our responsive foot pedals give you hands-free control over forward and reverse speed. The dash mounted cruise control lets you comfortably set your speed.



### Turning Perfection

With a 14" turning radius, you can spend less time mowing and more time enjoying your yard.

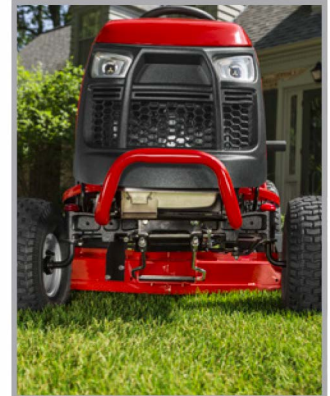

### Illuminating LED Headlights

LED headlights brighten your path when mowing at dawn or dusk.

**SPX 23/42**  
42" Deck  
23.0 Gross HP\*

724cc Briggs & Stratton  
Intek V-Twin Engine  
Tuff-Torq® K46  
Hydrostatic  
Transmission

**SPX 23/46**  
46" Deck  
23.0 Gross HP\*

724cc Briggs & Stratton  
Intek V-Twin Engine  
Tuff-Torq K46  
Hydrostatic  
Transmission

**SPX 25/42**  
42" Fabricated Deck  
25.0 Gross HP\*

724cc Briggs & Stratton  
Professional Series  
V-Twin Engine  
Tuff-Torq K46  
Hydrostatic  
Transmission

**SPX 25/48**  
48" Fabricated Deck  
25.0 Gross HP\*

724cc Briggs & Stratton  
Professional Series  
V-Twin Engine  
Tuff-Torq K46  
Hydrostatic  
Transmission

**See What Snapper Owners Are Saying:**

**★★★★★ 5 out of 5 stars**  
**Great Ride**

“The performance is simply awesome. This is a very well thought out machine. Turn radius is as advertised, plus the mower is comfortable to operate.” - *Glennj*

To read more customer reviews like this visit [www.snapper.com](http://www.snapper.com)

# Straightforward Design.





# 360Z



### Compact Footprint

36-inch compact fabricated deck options make it easy to navigate even the tightest parts of your lawn and takes up less space when in storage.



### Commercially-Inspired

A fully-welded steel frame, thick-walled front axle, durable mower deck, long-lasting caster spindles ensure durability and a great cut.



### Engine Options

High performance engine options include Briggs & Stratton Professional Series with ReadyStart technology, and the Kawasaki FR series making sure your zero turn mower has the power to perform year after year.



### More Than Just a Zero Turn

Snapper's first dirt-hauling, tool-toting, flower-delivering and, of course, grass-cutting zero turn mower. The integrated cargo bed<sup>†</sup> provides on-the-go versatility and convenience. Plus, the rail system is compatible with numerous third-party UTV/ATV accessories for added utility around your yard.

| 360Z 19/36<br>36" Fabricated Deck<br>19.0 Gross HP**   | 360Z 18/36<br>36" Fabricated Deck<br>18.0 Gross HP* | 360Z 23/46<br>46" Deck<br>23.0 Gross HP**              |
|--|---|--|
| 500cc Briggs & Stratton Professional Series OHV Engine | 603cc Kawasaki FR600V V-Twin OHV                    | 724cc Briggs & Stratton Professional Series V-Twin OHV |
| Hydro-Gear EZT <sup>®</sup> Hydrostatic Transaxles     | Hydro-Gear EZT Hydrostatic Transaxles               | Hydro-Gear EZT Hydrostatic Transaxles                  |
|  | Optional Cargo Bed <sup>†</sup>                     | Optional Cargo Bed <sup>†</sup>                        |

| 360Z 21.5/42<br>42" Fabricated Deck<br>21.5 Gross HP* | 360Z 23/42<br>42" Fabricated Deck<br>23.0 Gross HP** | 360Z 21.5/48<br>48" Fabricated Deck<br>21.5 Gross HP* | 360Z 23/48<br>48" Fabricated Deck<br>23.0 Gross HP** | 360Z 25/52<br>52" Fabricated Deck<br>25.0 Gross HP** | 360Z 21.5/52<br>52" Fabricated Deck<br>21.5 Gross HP* |
|---|--|---|--|--|---|
|---|--|---|--|--|---|

|  |   |  |   |   |   |
|--|---|--|---|---|---|
| 726cc Kawasaki FR Series V-Twin Engine | 724cc Briggs & Stratton Professional Series V-Twin Engine with ReadyStart | 726cc Kawasaki FR Series V-Twin Engine | 724cc Briggs & Stratton Professional Series V-Twin Engine with ReadyStart | 724cc Briggs & Stratton Professional Series V-Twin Engine with ReadyStart | 726cc Kawasaki FR Series V-Twin Engine    |
| Hydro-Gear EZT Hydrostatic Transaxles  | Hydro-Gear EZT Hydrostatic Transaxles                                     | Hydro-Gear EZT Hydrostatic Transaxles  | Hydro-Gear EZT Hydrostatic Transaxles                                     | Hydro-Gear ZT-2800 Hydrostatic Transaxles                                 | Hydro-Gear ZT-2800 Hydrostatic Transaxles |
| Optional Cargo Bed <sup>†</sup>        | Optional Cargo Bed <sup>†</sup>   | Cargo Bed <sup>†</sup>                 | Cargo Bed <sup>†</sup>  | Cargo Bed <sup>†</sup>  | Cargo Bed <sup>†</sup>                    |

\*All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

\*\*All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

†See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details.

350 lb. capacity, do not overload; do not carry passengers. Available on select models. See operator's manual for details. Additional cargo bed accessories sold separately. Ask dealer for details. For a full list of specifications, please see page 42-43.

Attachment listing, please see page 34.

See What Snapper Owners Are Saying:

★★★★★ 5 out of 5 stars

**Best Mower I've Ever Had**

“Bought this mower... and it is great. Our yard is about 3 acres and while I've had some good mowers, this one is the best. This is the first zero turn mower I've ever had, and it has shortened my mowing time down to 1 ½ hour. It used to take me about 3 hours. Wished I'd bought one sooner.” - *Catfish*

[www.snapper.com](http://www.snapper.com)

# New Levels of Versatility.



# S40

## ENGINE

- Choose from Kawasaki® FR651V or Briggs & Stratton Commercial Series engine options
- Patented advanced debris management system (Briggs & Stratton Commercial Series engine models)
- Two-stage industrial remote air-cleaner (Kawasaki models)
- Easy access oil drain

## DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-2800® transaxles feature 7" cooling fans that assist with repelling debris
- Pneumatic caster tires
- Ground speeds up to 8 mph

## MOWER DECK

- Available in 48" cutting widths
- Optimized fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge
- Aluminum spindles feature a 1" shaft with greaseable commercial oversized, double row ball bearings with bottom access grease fittings
- Durable 0.25" Marbain® steel blades
- Cut Height: 1.5" – 4.5"; adjusts in 0.25" increments
- Debris shield on idler pulleys extend bearing life

## CHASSIS

- Heavy-duty 1.5" – 2"; 11-gauge frame rails
- Mid-back seat features enhanced bolsting in seat
- Removable floor pan
- Heavy-duty bumper protects engine compartment

## FUEL SYSTEM

- Rugged, 5.5-gallon impact resistant fuel tank
- Extra large filler neck

## OPERATOR CONVENIENCE

- Comfortable thicker 1" tubular steering control levers
- Flip-up seat for easy access
- Ergonomic control panels

## ACCESSORIES

- Mulch kit, service jack



**4-Year or 500 Hours Limited Warranty†**

† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Refer to the engine operator's manual for engine warranty details.

| MODEL   | ENGINE (Gross Horsepower/Displacement)         | DECK |
|---------|--|------|
| 5901738 | Kawasaki FR651V (21.5*/651)                    | 48"  |
| 5901739 | Briggs & Stratton Commercial Series (23**/724) | 48"  |

\* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.  
 \*\* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

# Affordable Durability.



Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.



Hydro-Gear ZT-2800 Drive System is designed for high performance and is fully serviceable.



48" fabricated mower deck with reinforced top, corners, side skirts, and leading edge.



Turf-friendly 20" drive and 11" caster tires.

The S40 is a compact and built with commercial-grade components for a long life. Its compact size allows it to navigate tight areas with ease and a large fuel capacity allows more mowing between fill ups. This unit is a perfect match of commercial-grade quality and value.



# S50xt

## PROFESSIONAL



2+2 Year Limited Warranty†

The compact, easy-to-use S50xt zero-turn mower is designed specifically for the daily rigors of commercial mowing. This mower may be small in size, but it's big on features.

# Compact & Tough.

| MODEL   | ENGINE (Gross Horsepower/Displacement)          | DECK |
|---------|---|------|
| 5901609 | Kawasaki FX600V (19"/603cc)                     | 36"  |
| 5901610 | Briggs & Stratton Commercial Series (25"/724cc) | 36"  |
| 5901611 | Kawasaki FX600V (19"/603cc)                     | 48"  |
| 5901612 | Briggs & Stratton Commercial Series (25"/724cc) | 48"  |

\* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

\*\* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Refer to the engine operator's manual for engine warranty details.



## ENGINE

- Choose from Kawasaki® FX600V or Briggs & Stratton Commercial Series engine options
- Patented advanced debris management system (Briggs & Stratton Commercial Series models).
- Two-stage industrial remote air-cleaner (Kawasaki models)
- Easy access oil drain

## DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3100 Transaxles feature 7" cooling fans that assist with repelling debris
- Dual hydro fluid reservoirs and hydro filters
- Pneumatic caster tires
- Ground speed up to 7 mph

## MOWER DECK

- Available in 36" or 48" cutting widths
- iCD Cutting System on 48" models
- Optimized fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge on 36" models
- Cast-aluminum spindles feature 1" shaft with greaseable 2.5" x 1" dual ball bearings with top access grease fittings and pressure relief valve
- Durable, 0.25" Marbain® Steel blades
- Cut height: 1.5" - 4.5"; adjusts in 0.25" increments
- Debris shields on idler pulleys extend bearing life

## CHASSIS

- Heavy-duty 1.5" x 2", 11-gauge frame rails
- Mid-back seat features enhanced bolstering in seat, with armrests for added comfort, and offers adjustable fore and aft positioning
- Removable floor pan
- Heavy-duty bumper protects engine compartment

## FUEL SYSTEM

- Twin 4-gallon rugged, impact resistant fuel tanks with switch for fuel source (excludes 5901610)
- Single 4-gallon rugged, impact resistant fuel tank (5901610)
- Extra large filler neck(s)
- Top mounted fuel pick-up with Viton Seals

## OPERATOR CONVENIENCE

- Comfortable thicker 1" tubular steering control levers
- Flip-up seat for easy access
- Ergonomic control panels

## ACCESSORIES

- Collection system (48"), fabric grass catcher (36"), metal grass catcher (36"), mulch kit, trailer hitch kit, light kit, flat-free caster tires, professional stripe kit (48"), service jack



The easy-to-use deck-lift takes the effort out of adjusting cut height. Cutting height ranges from 1.5" - 4.5" in 0.25" increments.



Features greaseable cast-aluminum spindles for longer usable life.



Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.



Hydro-Gear ZT-3100 Drive System is designed for high performance and is fully serviceable.



# S120



**4-Year or 500 Hours Limited Warranty†**

With powerful engine choices, 52" or 61" iCD Cutting System mower deck options and speeds up to 10mph, the S120 zero-turn mower will cut your job down to size. The heavy-duty components, including the commercial Hydro-Gear ZT3200 transaxles, will keep you mowing season after season.

## Value & Performance.

| MODEL   | ENGINE (Gross Horsepower/Displacement)          | DECK |
|---------|---|------|
| 5901867 | Briggs & Stratton Commercial Series (25*/724cc) | 52"  |
| 5901865 | Kawasaki FR730V (24**/726cc)                    | 52"  |
| 5901862 | Briggs & Stratton Commercial Series (25*/724cc) | 61"  |
| 5901868 | Kawasaki FR730V (24**/726cc)                    | 61"  |

\* All power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton

\*\* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki

† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Refer to the engine operator's manual for engine warranty details.

## ENGINE

- Choose from Briggs & Stratton Commercial Series or Kawasaki® FR730V engine options
- Patented advanced debris management system (Briggs & Stratton Commercial Series models)
- Easy-to-use oil drain

## DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3200 Transaxles feature 7" cooling fans that assist with repelling debris
- Pneumatic caster tires
- Ground speed up to 10 mph

## MOWER DECK

- Available in 52" or 61" cutting widths
- iCD Cutting System
- Features cast-aluminum spindles with greaseable 2.5" diameter ball bearings
- Cut height: 1.5" - 5"; adjusts in 0.25" increments
- Debris shields on idler pulleys extend bearing life

## CHASSIS

- Heavy-duty 1.5" x 2", 11-gauge frame rails
- Removable floor pan
- Heavy-duty bumper protects engine compartment

## FUEL SYSTEM

- Single 5-gallon rugged, impact resistant fuel tank
- Extra large filler neck
- Top mounted fuel pick-up with Viton Seals

## OPERATOR CONVENIENCE

- Deluxe mid-back seat with arm rests
- Comfortable thicker 1" tubular steering control levers
- Flip-up seat for easy access
- Ergonomic control panels with cup holder and storage compartment
- Control system provides smooth, precise steering

## ACCESSORIES

- Collection system, mulch kit, hitch kit, ROPS mounted LED light kit, flat-free caster tires, professional stripe kit, service jack



The easy to use deck lift takes the effort out of adjusting cut height. Cutting height ranges from 1.5" - 5" in 0.25" increments.



Hydro-Gear ZT-3200 Commercial Engineered Drive System is designed for high performance and is fully serviceable.



Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.



The Briggs & Stratton Commercial Series Engine features a patented advanced debris management system which deflects dirt and debris from the engine, and any remaining debris is trapped in the high-capacity, dual-sealing air cleaner cartridge.





# S200xt


## PROFESSIONAL



Vanguard engines with Oil Guard System reduce oil maintenance time and costs by up to 60%.<sup>‡</sup>



Dual, commercial Hydro-Gear ZT-5400 Powertrain<sup>®</sup> Transaxles deliver unmatched power and durability.



The easy-to-use deck-lift takes the effort out of adjusting cut height. Cutting height ranges from 1.5" - 5" in 0.25" increments.



Quick removal of the floor pan provides convenient access to the top of the deck for easy cleaning and service.

**2+2 Year Limited Warranty<sup>†</sup> | 3-Year Limited Belt Warranty<sup>†</sup>**



| MODEL   | ENGINE (Gross Horsepower/Displacement)                           | DECK |
|---------|--|------|
| 5901664 | Kawasaki FX801V (25.5"/852cc)                                    | 61"  |
| 5901280 | Briggs & Stratton Commercial Series (27**/810cc)                 | 61"  |
| 5901665 | Vanguard 810 EFI with <b>Oil Guard System</b> (28**/810cc)       | 61"  |
| 5901666 | Vanguard BIG BLOCK EFI with <b>Oil Guard System</b> (37**/993cc) | 61"  |
| 5901667 | Vanguard BIG BLOCK EFI with <b>Oil Guard System</b> (37**/993cc) | 72"  |

\* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

\*\* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Refer to the engine operator's manual for engine warranty details.

‡ Cost savings based on standard oil maintenance with 100 hour interval versus Oil Guard<sup>™</sup> System 500 hour service interval.

## ENGINE

- Choose from Kawasaki® FX801V, Briggs & Stratton Commercial Series, Vanguard 810 EFI with **Oil Guard System**, Vanguard BIG BLOCK™ with **Oil Guard System**, or Vanguard BIG BLOCK EFI with **Oil Guard System** engine options
- Patented advanced debris management system (Briggs & Stratton Commercial Series models)
- Two-stage industrial air-cleaner (Vanguard and Kawasaki models)
- Easy access oil drain

## DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-5400 Powertrain Transaxles feature 9" cooling fans that assist with repelling debris
- Dual hydro fluid reservoirs and hydro filters
- Pneumatic caster tires
- Five-bolt pattern wheels
- Ground speed up to 10 mph

## MOWER DECK

- Available in 61" or 72" cutting widths
- iCD™ Cutting System
- 2-belt drive system that improves belt life and is more dependable (excludes 5901280)
- Cast-iron spindles with greaseable bearings for longer usable life, 1" shaft with top access grease fitting, 6-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly (61" models)
- Hercules™ II Spindles; 10" diameter cast-iron with industrial double row angular contact ball bearings with 1 3/16" diameter shaft (72" model)
- Cut height: 1.5" – 5"; adjust in 0.25" increments
- Debris shields on idler pulleys extend bearing life

## CHASSIS

- Heavy-duty 2" x 2" 7-gauge frame rails
- Removable floor pan
- Heavy-duty bumper protects engine compartment

## FUEL SYSTEM

- Twin 5-gallon rugged, impact resistant fuel tanks with switch for fuel source (excludes model 5901280)
- Single 5-gallon rugged, impact resistant fuel tank (5901280)
- Extra large filler neck(s)
- Top-mounted fuel pick-up with Viton Seals

## OPERATOR CONVENIENCE

- Deluxe high-back suspension seat on Oil Guard models (5901665, 5901666, & 5901667)
- Premium mid-back adjustable seat with padded arm rests (5901280 & 5901664)
- Comfortable thicker 1" tubular steering control levers
- Flip-up seat for easy access
- Ergonomic control panels with cup-holder and storage compartment

## ACCESSORIES

- Collection system (61"), mulch kit, trailer hitch kit, ROPS mounted LED light kit, flat-free caster tires, professional stripe kit, service jack

## 3-YEAR BELT LIMITED WARRANTY†

- The limited warranty for the 2-belt mowers decks provides coverage for three years (36 months) or 300 hours, whichever occurs first. It covers parts & labor in year one and parts only in years two and three. (excludes model 5901280)

# Productivity Redefined.

The S200xt is equipped to ride for a full day of work with impressive features and premium components. Available with our iCD Cutting System deck in 61" and 72" cutting widths, the S200xt will cut your big jobs down to size. This machine delivers maximum performance and productivity.



† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Refer to the engine operator's manual for engine warranty details.



# SS100

## PROFESSIONAL

2+2 Year Limited Warranty† | 5-Year Limited Suspension Warranty† | 3-Year Limited Transaxle Warranty†

The SS100 offers the added productivity of a stand-on unit in a compact package. It is built for navigating through tight gates or loading on small trailers. This unit pushes the limits of productivity and value for the commercial landscaper.

# Compact Performance.

| MODEL   | ENGINE (Gross Horsepower/Displacement) | DECK |
|---------|--|------|
| 5901800 | Kawasaki FX600V (19*/603)              | 36"  |
| 5901801 | Vanguard V-Twin OHV (23**/627)         | 48"  |

\* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

\*\* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Refer to the engine operator's manual for engine warranty details.

## ENGINE

- Choose from Kawasaki® FX600V or Vanguard V-Twin OHV engine options
- Patented advanced debris management system (Vanguard engine models)
- Easy access oil drain

## DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3400 transaxles feature 7" cooling fans that assist with repelling debris
- 11 x 4-5 flat-free caster tires
- Ground speeds up to 8 mph

## MOWER DECK

- Available in 36" and 48" cutting widths
- iCD cutting system (48" deck)
- Optimized fabricated 10-gauge with double top deck, overlap welded corners and double reinforced side skirts, steel reinforced leading edge (36" deck)
- Cast-aluminum spindles feature a 1" shaft with greaseable 2.5" x 1" dual ball bearings with top access grease fittings and pressure relief valves
- Durable 0.25" Marbain® steel blades
- Cut Height: 1.75" - 4.5", adjusts in 0.25" increments
- Debris shield on idler pulleys extend bearing life

## CHASSIS

- Heavy-duty frame rail – 1.5 x 2 x 11 gauge
- Ergonomic design for standing comfort
- Superior balance provides stability and maneuverability

## FUEL SYSTEM

- Centrally mounted 6-gallon fuel tank
- Extra large filler neck

## OPERATOR CONVENIENCE

- Easy-locking 3-position speed control
- PTO conveniently disengages when the operator leaves the platform to move an obstacle or pick up debris and re-engages when the operator steps back onto the platform and re-activates the PTO switch
- The operator suspension platform system is adjustable for a large range of weights and operating conditions, optimizing operator comfort and increasing productivity

## ACCESSORIES

- Metal grass catcher, mulch kit, LED light kit



The suspension platform system is adjustable for a large range of weights and operating conditions, optimizing operator comfort and increasing productivity.



The PTO conveniently disengages when the operator leaves the platform to move an obstacle or pick up debris. When the operator steps back onto the platform and re-engages the PTO switch, the blades start again for continued mowing.



The easy locking 3-position speed control setting is conveniently located and requires no tools to facilitate smooth operation in a wide range of conditions.



# SS200

## PROFESSIONAL

The SS200 balances stability with maneuverability for a unit that takes traction and handling to the next level. An adjustable operator platform with suspension optimizes operator comfort and increases productivity, allowing custom operation in a variety of conditions.

**2+2 Year Limited Warranty<sup>†</sup> | 5-Year Limited Suspension Warranty<sup>†</sup> | 3-Year Limited Transaxle Warranty<sup>†</sup>**

### ENGINE

- Vanguard 810 EFI w/Oil Guard System engine
- Two-stage industrial air cleaner
- Oil Guard System extends oil change intervals to 500 hours
- Easy access oil drain

### DRIVE SYSTEM

- Independent, commercial Hydro-Gear ZT-3800<sup>®</sup> transaxles with standard oil coolers feature
- 13 x 5-6 flat-free caster tires
- Ground speeds up to 10 mph

### MOWER DECK

- Available in 52" and 61" cutting widths
- iCD cutting system
- Cast-aluminum spindles feature a 1" shaft with greaseable 2.5" x 1" dual ball bearings with top access grease fittings and pressure relief valves (52" deck)
- Cast-iron spindles with greaseable bearings for longer usable life, 1" shaft with top access grease fitting, 6-bolt 8" flange design adds strength and greater dispersal of energy to deck assembly (61" deck)
- Durable 0.25" Marbain<sup>®</sup> steel blades
- Cut Height: 1.75" – 5"; adjusts in 0.25" increments
- Debris shield on idler pulleys extend bearing life

### CHASSIS

- Heavy-duty frame rail – 1.5 x 2 x 11 gauge
- Ergonomic design for standing comfort
- Superior balance provides stability and maneuverability

### FUEL SYSTEM

- Centrally mounted 8-gallon fuel tank
- Extra large filler neck

### OPERATOR CONVENIENCE


- Easy-locking 3-position speed control
- PTO conveniently disengages when the operator leaves the platform to move an obstacle or pick up debris and re-engages when the operator steps back onto the platform and re-activates the PTO switch
- The operator suspension platform system is adjustable for a large range of weights and operating conditions, optimizing operator comfort and increasing productivity

### ACCESSORIES

- Metal grass catcher (52" deck only), mulch kit, LED light kit

<sup>†</sup> See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Refer to the engine operator's manual for engine warranty details.





The PTO conveniently disengages when the operator leaves the platform to move an obstacle or pick up debris. When the operator steps back onto the platform and re-engages the PTO switch, the blades start again for continued mowing.



The easy locking 3-position speed control setting is conveniently located and requires no tools to facilitate smooth operation in a wide range of conditions.



The suspension platform system is adjustable for a large range of weights and operating conditions, optimizing operator comfort and increasing productivity.



# Next Level Traction.



## MODEL

5901861  
5901860

## ENGINE (Gross Horsepower/Displacement)

Vanguard 810cc EFI with **Oil Guard System** (28\*/810)  
Vanguard 810cc EFI with **Oil Guard System** (28\*/810)

## DECK

52"  
61"

\* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

# It's Easy to Get Attached.

When it comes to yard care, mowing is not always enough. Sometimes you want a variety of tools at your fingertips to complete the broad range of tasks for a great looking yard.

|                                 |                                 | Rear Engine Riders & Lawn Tractors                |                            | Zero Turn Mowers   |
|---------------------------------|---------------------------------|---|----------------------------|--|
| COLLECTORS & COLLECTION SYSTEMS | ATTACHMENT                      | Rear Engine Rider                                 |                            |  |
|                                 | Mulcher Kit                     | NINJA® Mulching Blade                             | 42", 46", 48"              | 36", 42", 46", 48", 52"  |
|                                 | Single Catcher*                 | 5-bu.<br>(28" 33" mower - requires bagging blade) | N/A                        | N/A  |
|                                 | Twin Catcher*                   | N/A   | 6.5-bu.<br>(42" mower)     | 6.5-bu.<br>(36", 42", 46", 48", 52" mower)                     |
|                                 | Deck Adapter Kit                | N/A   | N/A                        | 36", 42", 46", 48" mower<br>(needed for use with Twin Catcher) |
|                                 | Triple Catcher                  | N/A   | 10-bu. (46", 48" mower)    | N/A  |
|                                 | Turbo Attachment                | N/A   | 46", 48" mower             | 52" mower  |
|                                 | Striping Kit                    | N/A   | N/A                        | N/A  |
|                                 | Dump Cart                       | 10-cu. ft.  | 10-cu. ft.                 | 10-cu. ft.   |
| MULTIPURPOSE ATTACHMENTS        | Front & Rear Weight Carriers    | N/A   | Available                  | N/A  |
|                                 | Suitcase Weights                | N/A   | 33-lb.                     | N/A  |
|                                 | Quick Attach Rear Wheel Weights | N/A   | 31-lb.                     | N/A  |
|                                 | Hitch Kit                       | N/A   | (Standard)                 | 36" Req. Accessory (Not Standard)                              |
|                                 | Headlight Kit                   | N/A   | N/A                        | Available  |
|                                 | Arm Rest Kit                    | N/A   | Available                  | Available  |
|                                 | Cargo Bed**                     | N/A   | N/A                        | (Standard on 48", 52")   |
|                                 | Cargo Bed Rhino Grips           | N/A   | N/A                        | Compatible with Cargo Bed**                                    |
|                                 | Mesh Seat Kit                   | N/A   | N/A                        | Available  |
|                                 | Hour Meter Kit                  | N/A   | (Standard)                 | (Standard)   |
|                                 | Caster Tire, Flat Free Kit      | N/A   | N/A                        | N/A  |
|                                 | Dust Cover                      | Available   | Available                  | N/A  |
|                                 | Front Bumper                    | N/A   | Standard                   | N/A  |
| SNOW REMOVAL ATTACHMENTS        | Single-Stage Snow Blower        | N/A   | 42"                        | N/A  |
|                                 | Snow Cab                        | N/A   | Soft Side (All Vinyl)      | N/A  |
| GROUND MAINTENANCE ATTACHMENTS  | Tiller                          | N/A   | 36" Gas-Powered Tow-Behind | N/A  |
|                                 | Dozer Blade                     | N/A   | 42" Includes Hitch & Lever | N/A  |
|                                 | Dethatcher                      | N/A   | 40" Tow-Behind             | N/A  |

\*Select collections systems for zero turn models are available with or without a turbo.

\*\*50-lb. (360Z) or 100-lb. (560Z) capacity, do not overload; do not carry passengers. Standard on most models. See operator's manual for details.

Note: Attachments for previous year models and additional attachments through allied equipment manufacturers not shown may be available. Some attachments require additional installation components (i.e. front weights for catchers). Please see dealer for details.



**Mulch Kit**

Select kits include dedicated mulching blades, baffles, hardware and instruction sheet.



**Trailer Hitch Kit**

Will accept a 1/2" shank ball and comes complete with hardware.



**LED Light Kit**

Energy efficient LED light kit with simple installation.



**Flat-Free Caster Tires**

Run all day with no flats, eliminates downtime. Standard on walk-behind models.



**SW15 Cloth Bagger**

A cloth catcher with 7' hose and 90° inlet makes attaching and removing easy. Capacity: 2.5 bushels.



**Professional Stripe Kit**

Rubber flap system lays down grass to create patterns across the landscape.



**Fabric Grass Catcher**

A lightweight durable 3.75 bushels, fabric bag with hard plastic bottom attaches quickly.



**Metal Grass Catcher**

Rugged steel framed catcher has handles that make attaching and removing a breeze. Capacity: 3.5 bushels. (Select models)



S200xt shown with Service Jack



**Service Jack**

Heavy duty steel bracket and jack allow for easy and convenient access to under the deck.





**Sulky**

One-wheel and two-wheel options for use with walk behind models.

# Collection Systems

|   |   | <b>S200xt</b>   | <b>S120</b>                       | <b>S50xt</b>                  | <b>S40</b>                    |
|---|---|---|-----------------------------------|-------------------------------|-------------------------------|
|    | <p><b>DOUBLE BAG HARD TOP</b></p> <p>Innovative molded hard top design allows for increased capacity. Simple to install. Each heavy-duty mesh bag has an integrated handle to assist with removal.</p> <p>Capacity: 10 cubic feet</p> | N/A   | <b>TURBO-PRO™</b><br>52" Deck     | <b>TURBO-PRO™</b><br>48" Deck | <b>TURBO-PRO™</b><br>48" Deck |
|    | <p><b>TRIPLE BAG SOFT TOP</b></p> <p>Simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal.</p> <p>Capacity: 12.5 cubic feet</p>                              | <b>TURBO-PRO™ MAX</b><br>61" Deck<br><b>FAST-VAC®</b><br>61" Deck | N/A                               | N/A                           | N/A                           |
|   | <p><b>TRIPLE BAG HARD TOP</b></p> <p>Innovative molded hard top design allows for increased capacity. Simple to install. Each heavy-duty mesh bag has an integrated handle to assist with removal.</p> <p>Capacity: 15 cubic feet</p> | <b>TURBO-PRO™ MAX</b><br>61" Deck                                 | <b>TURBO-PRO™</b><br>52"/61" Deck | N/A                           | N/A                           |
|  | <p><b>ELECTRIC DFS</b> (Dump From Seat)</p> <p>Simply flip the switch on the control panel to release the hopper right from your seat.</p> <p>Capacity: 12.5 cubic feet</p>   | <b>TURBO-PRO™ MAX</b><br>61" Deck<br><b>FAST-VAC®</b><br>61" Deck | N/A                               | N/A                           | N/A                           |

## S200xt

|   |   |   |
|---|---|---|
|  | <p><b>EZ DUMP™</b> (Dump From Seat)</p> <p>Simply pull up to release the hopper right from your seat. The hopper is specially lined to ensure that all material is dumped.</p> <p>Capacity: 12 cubic feet</p>                           | <b>TURBO-PRO™ MAX</b><br>61" Deck<br><b>FAST-VAC®</b><br>61" Deck |
|  | <p><b>EZ DUMP XL™</b> (Dump From Seat)</p> <p>Ideal for larger jobs. Simply pull up to release the hopper right from your seat. The hopper is specially lined to ensure that all material is dumped.</p> <p>Capacity: 14 cubic feet</p> | <b>TURBO-PRO™ MAX</b><br>61" Deck                                 |



### EZ DUMP WINCH

This hand operated winch makes installing and uninstalling the EZ Dump and EZ Dump XL easy and convenient for a single person and is standard with both hopper options.

## TURBO-PRO

The TURBO-Pro System is a lightweight blower assembly ideal for use with compact models in all cutting conditions throughout the entire season.

- Generous 6" diameter outlet hose
- Durable composite impeller housing with reinforced metal plate for high contact debris areas
- Heavy-duty oversized drive and idler pulleys combined with long drive belt allow for cool running and maximum belt life
- Curved steel blade impeller reduces noise
- After initial installation, the quick attach design can be mounted or removed with no tools in a few minutes




TURBO-Pro Blower\* — Length: 31" Height: 16.5" Width: 19"  
Approximate blower weight: 50 lbs. (44"/48") / 53 lbs. (52") / 55 lbs. (61"), includes mounting bracket

## TURBO-PRO MAX

This go-to system for landscapers acts as a lawn vacuum for a clean finish. It quickly mounts to the deck with tool-less stainless steel hardware. It is ideal for use in all conditions found throughout the season.

- Extra wide 7" diameter outlet hose
- Twice the airflow vs. Turbo-Pro for increased capacity on larger decks cutting at higher speeds
- Rugged steel impeller housing designed for extended life
- Heavy-duty oversized drive and idler pulleys combined with a long drive belt allow for cool running and maximum belt life
- After initial installation, the quick attach design can be mounted or removed with no tools in a few minutes



TURBO-Pro Max Blower\* — Length: 36" Height: 18" Width: 21"  
Approximate blower weight: 72 lbs. (52") / 64 lbs. (61"), includes mounting bracket

## FAST-VAC

The rugged impeller utilizes industrial grade bearings, generating phenomenal airflow for use in heavy and wet cutting conditions. Its spindle-driven vertical turbo is narrower, allowing you to get in and out of tight places.

- Extra wide 7" diameter outlet hose
- Super rugged impeller rides on industrial-grade bearings to generate a phenomenal airflow
- Commercial-grade idler and pulleys drive the vertical, spindle-driven turbo resulting in a very narrow profile for improved maneuverability



FAST-Vac Blower\* — Length: 36.8" Height: 20.2" Width: 15.2"  
Approximate blower weight: 83 lbs. (52") / 85 lbs. (61"), includes mounting bracket

\*Dimensions listed are the dimensions of the blower unit and do not represent what they might actually add to the mower.

**S200xt S120 S50xt S40 SS100 SS200 SW35 SW25 SW15**

|                         | S200xt   | S120     | S50xt                       | S40      | SS100    | SS200                       | SW35     | SW25                        | SW15     |
|-------------------------|----------|----------|-----------------------------|----------|----------|-----------------------------|----------|-----------------------------|----------|
| Mulch Kit               | Optional | Optional | Optional                    | Optional | Optional | Optional                    | Optional | Optional                    | Optional |
| Trailer Hitch Kit       | Optional | N/A      | Optional                    | N/A      | N/A      | N/A                         | N/A      | N/A                         | N/A      |
| LED Light Kit           | Optional | Optional | Optional                    | Optional | Optional | Optional                    | Optional | N/A                         | N/A      |
| Flat-Free Caster Tires  | Optional | N/A      | Optional                    | N/A      | Standard | Standard                    | Standard | Standard                    | N/A      |
| Professional Stripe Kit | Optional | Optional | Optional<br>48" models only | N/A      | Optional | Optional                    | Optional | Optional<br>48" models only | N/A      |
| Fabric Grass Catcher    | N/A      | N/A      | Optional<br>36" models only | N/A      | N/A      | N/A                         | Optional | Optional                    | Optional |
| Metal Grass Catcher     | N/A      | N/A      | Optional<br>36" models only | N/A      | Optional | Optional<br>52" models only | Optional | Optional                    | N/A      |
| Service Jack            | Optional | Optional | Optional                    | Optional | N/A      | N/A                         | N/A      | N/A                         | N/A      |
| Weight Kit              | N/A      | N/A      | N/A                         | N/A      | N/A      | N/A                         | Optional | Optional                    | N/A      |
| Sulky                   | N/A      | N/A      | N/A                         | N/A      | N/A      | N/A                         | Optional | Optional                    | N/A      |

**NOT SEEING THE ATTACHMENT OR ACCESSORY YOU ARE LOOKING FOR?**

Contact your local Snapper Pro dealer for more information and installation assistance.



**TEXT 'PRO' TO 33988 TO FIND A DEALER**

Data rates apply.\*



# Walk Mower Specifications



## Quiet Power Series

| Model                      | 21725Q                               | P21725Q | P21850Q           | P21850QES                                 |
|----------------------------|--------------------------------------|---------|-------------------|---|
| <b>Engine</b>              |                                      |         |                   |   |
| <b>Brand</b>               | Briggs & Stratton QPT® Series        |         |                   |   |
| <b>Technology</b>          | QPT®, Just Check & Add™, ReadyStart® |         | QPT®, ReadyStart® | QPT®, InStart®, and Our Starting Promise™ |
| <b>Torque</b>              | 7.25 ft-lbs¹ Gross                   |         | 8.5 ft-lbs¹ Gross |   |
| <b>Displacement</b>        | 163cc                                |         | 190cc             |   |
| <b>Choke</b>               | ReadyStart® No Prime, No Choke       |         |                   | InStart®                                  |
| <b>Starting Type</b>       | Recoil                               |         |                   | Push Button                               |
| <b>Mower Configuration</b> |                                      |         |                   |   |
| <b>Side Discharge</b>      |                                      |         |                   | Standard                                  |
| <b>Mulching</b>            |                                      |         |                   | Standard                                  |
| <b>Bagging</b>             |                                      |         |                   | Standard                                  |
| <b>Cutting Width</b>       |                                      |         |                   | 21"                                       |
| <b>Limited Warranty*</b>   |                                      |         |                   |   |
| <b>Residential</b>         |                                      |         |                   | 3-Year                                    |
| <b>Commercial</b>          |                                      |         |                   | 90-Day                                    |

## HI VAC®/NINJA® Series

## Commercial Series

| Model                      | 2185020                                | P2185020             | P2185020E | RP2185020 | CRP218520          | CP215520HV   |
|----------------------------|--|----------------------|-----------|-----------|--------------------|--------------|
| <b>Engine</b>              |  |                      |           |           |                    |              |
| <b>Brand</b>               | Briggs & Stratton Professional Series™ |                      |           |           |                    | Honda GXV160 |
| <b>Technology</b>          | OHV                                    |                      |           |           |                    |              |
| <b>Torque</b>              | 8.50 ft-lbs¹ Gross                     |                      |           |           |                    | 7.1 ft-lbs¹  |
| <b>Displacement</b>        | 190cc                                  |                      |           |           |                    | 163cc        |
| <b>Choke</b>               | ReadyStart® No Prime, No Choke         |                      |           |           |                    | Manual Choke |
| <b>Starting Type</b>       | Recoil                                 | Key Electric, Recoil |           | Recoil    |                    | Recoil       |
| <b>Engine Features</b>     | Cast-iron Sleeve                       |                      |           |           | Spin-on Oil Filter |              |
| <b>Mower Configuration</b> |  |                      |           |           |                    |              |
| <b>Side Discharge</b>      | Optional                               |                      |           |           | Standard           | Optional     |
| <b>Mulching</b>            | Optional                               | Standard             |           | NINJA®    |                    | Optional     |
| <b>Bagging</b>             | HI VAC®                                |                      |           | Optional  |                    | HI VAC®      |
| <b>Limited Warranty*</b>   |  |                      |           |           |                    |              |
| <b>Residential</b>         |  |                      |           |           |                    | 3-Year       |
| <b>Commercial</b>          |  |                      |           |           |                    | 90-Day       |

\*Go to [www.snapper.com](http://www.snapper.com) for terms and privacy information.

¹All power levels are stated gross torque at 2600 RPM per SAE J1940 as rated by Briggs & Stratton.

²Power rated by engine manufacturer.

³See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Length of engine coverage varies by manufacturer.



# Walk Mower Specifications

## SW15

## SW25

## SW35

| Model  | 5901863   | 5901864               | 5901497  | 5901436      | 5901498       | 5901317  | 5901261 | 5901316     | 5901231              | 5901232   |
|--|---|-----------------------|--|--------------|---------------|--|---------|-------------|----------------------|-----------|
| <b>Engine</b>                                    |   |                       |  |              |               |  |         |             |                      |           |
| <b>Make</b>                                      | Honda®  |                       | Kawasaki®  |              |               | Kawasaki®  |         |             |                      |           |
| <b>Model</b>                                     | GXV390  |                       | FS541V   | FS600V       |               | FX651V   |         |             | FX730V               |           |
| <b>Power Rating (hp)</b>                         | 10.2***   |                       | 15**   | 18.5**       |               | 20.5**   |         |             | 23.5**               |           |
| <b>Displacement (cc)</b>                         | 389   |                       | 603  |              |               | 726  |         |             |                      |           |
| <b>Cylinders</b>                                 | 1   |                       | 2  |              |               | 2  |         |             |                      |           |
| <b>Oil Guard™ System</b>                         | N/A   |                       | N/A  |              |               | N/A  |         |             |                      |           |
| <b>Total Fuel Capacity</b>                       | 0.55 gallons  |                       | 5 gallons  |              |               | 5 gallons  |         |             |                      |           |
| <b>Mower</b>                                     |   |                       |  |              |               |  |         |             |                      |           |
| <b>Cutting Width (in.)</b>                       | 32  |                       | 48   | 36           | 48            | 48   | 52      |             | 61                   |           |
| <b>Cutting Height (in.)</b>                      | 1.5 - 5   |                       | 1.5 - 4.5  |              |               | 1.5 - 4.75   |         |             |                      |           |
| <b>Deck Construction</b>                         | 14 and 12-gauge   |                       | 10-gauge, fabricated   |              |               | 10-gauge, fabricated   |         |             |                      |           |
| <b>Greaseable Spindles</b>                       | Aluminum Greasable  |                       | Cast-aluminum  |              |               | Cast-aluminum  |         |             | Cast-iron, greasable |           |
| <b>Drive System</b>                              |   |                       |  |              |               |  |         |             |                      |           |
| <b>Transaxles</b>                                | Peerless Axle with different chain driven by Hydro-Gear® RT-310 pump and motor  |                       | Hydro-Gear® ZT-3100® with 7" cooling fans  |              |               | Hydro-Gear® ZT-3100® with 7" cooling fans  |         |             |                      |           |
| <b>Drive Axles (in.)</b>                         | 0.75  |                       | 1  |              |               | 1  |         |             |                      |           |
| <b>Drive Tires (in.)</b>                         | 13 x 5 - 6  |                       | 20 x 7 - 10  |              |               | 20 x 7 - 10  |         | 20 x 8 - 10 |                      |           |
| <b>Caster Tires (in.)</b>                        | 10.5 x 3 Fixed Wheel  | 10.5 x 3 Caster Wheel | 9 x 3.5 - 4 Flat-free  |              |               | 11 x 4 - 5 Flat-free   |         |             |                      |           |
| <b>Ground Speed</b>                              |   |                       |  |              |               |  |         |             |                      |           |
| <b>Forward (mph)</b>                             | 0-4   |                       | 0-6  |              |               | 0-7  |         |             |                      |           |
| <b>Reverse (mph)</b>                             | 0-2   |                       | 0-3  |              |               | 0-3  |         |             |                      |           |
| <b>Dimensions</b>                                |   |                       |  |              |               |  |         |             |                      |           |
| <b>Overall Length (in.)</b>                      | 74.25   | 73.5                  | 75.5   | 73           | 71            | 78.75  | 75      | 78.75       | 75                   | 81.5      |
| <b>Overall Width (in.) (deflector down / up)</b> | 44/32.5   |                       | 59.75 / 52.25  | 48.5 / 40.75 | 59.75 / 52.25 | 62.5 / 49.5  |         | 67 / 57     |                      | 76.5 / 65 |
| <b>Dry Weight (lbs.)</b>                         | 280   | 285                   | 694  | 632          | 694           | 809  |         | 814         |                      | 888       |
| <b>Operator Control &amp; Comfort Systems</b>    |   |                       |  |              |               |  |         |             |                      |           |
| <b>Seat Package</b>                              | N/A   |                       | N/A  |              |               | N/A  |         |             |                      |           |
| <b>ROPS</b>                                      | N/A   |                       | N/A  |              |               | N/A  |         |             |                      |           |
| <b>Controls</b>                                  | Ergonomic   |                       | Standard   | CC™          | CC™           | Standard   | CC™     | Standard    | CC™                  | Standard  |
| <b>Instrumentation</b>                           | Speed indicator   |                       | Hour meter, speed indicator  |              |               | Hour meter, speed indicator  |         |             |                      |           |
| <b>Safety Group / Controls</b>                   | Blade control bail OPC  |                       | Operator presence, centralized foot activated neutral pedals, neutral start safety circuit / CC™ (centralized controls) or standard controls |              |               | Operator presence, centralized foot activated neutral pedals, neutral start safety circuit / CC™ (centralized controls) or standard controls |         |             |                      |           |
| <b>Parking Brake</b>                             | Internal transaxle  |                       | Internal transaxle   |              |               | Internal transaxle   |         |             |                      |           |
| <b>Warranty</b>                                  |   |                       |  |              |               |  |         |             |                      |           |
| <b>Engine†</b>                                   | See Engine Operator's Manual  |                       | 3-Year limited manufacturer's warranty   |              |               |  |         |             |                      |           |
| <b>Balance of Machine‡</b>                       | 2-Year limited warranty commercial use, front-to-rear, parts & labor. Coverage on other components varies, please see operator's manual for complete details. |                       | 2-Year limited warranty commercial use, front-to-rear, parts & labor. Belts, tires, battery, blades: 90 days.                                |              |               |  |         |             |                      |           |

\* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

\*\* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

\*\*\* Power rated by engine manufacturer.

† Refer to engine operator's manual for engine warranty details.

‡ See operator's manual or www.snapper.com for complete warranty details.



# Tractor Specifications



| Model                             | RER-2811525BVE<br>2691525       | RER-3315525BVE<br>2691526 | SPX™ 23/42<br>2691556               |
|-----------------------------------|---------------------------------|---------------------------|-------------------------------------|
| <b>Engine</b>                     |                                 |                           |                                     |
| Brand                             | Briggs & Stratton Intek™ Engine |                           | Briggs & Stratton Intek™ V-Twin OHV |
| Power Rating / Cylinders          | 11.5' / 1                       | 15.5' / 1                 | 23' / 2                             |
| Engine Displacement (cc)          | 344                             | 500                       | 724                                 |
| Choke / Throttle                  | Choke-a-Matic                   |                           |                                     |
| Start Type                        | Key                             |                           |                                     |
| Engine Features                   | Spin-On Oil Filter              |                           |                                     |
| Fuel Tank Capacity (U.S. Gallons) | 1.35                            |                           | 3.5                                 |
| 12V Battery (cca)                 | 190                             |                           | 230                                 |
| <b>Transmission</b>               |                                 |                           |                                     |
| Transmission Make                 | Snapper® Disc Drive             |                           | Tuff-Torq® K46                      |
| Differential                      | 5-Speed, Disc Drive             |                           | Hydro                               |
| Speed Control Design              | Gear Shift Lever                |                           | Foot Pedals                         |
| Speed- Fwd / Rev. (mph)           | 1 - 4.5 / 0 - 1.9               |                           | 0 - 5.5 / 0 - 3.3                   |
| Brake                             | Friction                        |                           | Disc                                |
| <b>Chassis</b>                    |                                 |                           |                                     |
| Frame                             | 12-Gauge Steel                  |                           |                                     |
| Front Axle                        | Welded Steel                    |                           | Cast-Iron                           |
| Turning Radius (Inches)           | 28                              |                           | 14                                  |
| Front Tires (Inches)              | 11 x 4                          |                           | 15 x 6                              |
| Rear Tires (Inches)               | 16 x 6.50                       |                           | 20 x 8                              |
| Number of Anti-Scalp Wheels       | N/A                             |                           | 2                                   |
| Seat                              | 11" Mid-Back, Adjustable        |                           | 15" Mid-Back, Adjustable            |
| Steering                          | Quick Response Handle           |                           | Soft Grip, Wheel                    |
| <b>Mower Deck</b>                 |                                 |                           |                                     |
| Deck Type                         | Stamped Steel                   |                           |                                     |
| Cutting Width (Inches)            | 28                              | 33                        | 42                                  |
| Mower Configuration               | Mulching & Side Discharge       |                           | Side Discharge                      |
| Number of Blades                  | 1                               |                           | 2                                   |
| Height-of-Cut Range (Inches)      | 1.5 - 4                         |                           | 1.5 - 3.5                           |
| Height-of-Cut Positions           | 5                               |                           | 7                                   |
| Blade Engagement                  | Manual Lever                    |                           | Electric                            |
| Deck Suspension                   | Frame Hung                      |                           |                                     |
| Deck Thickness                    | 13-Gauge                        |                           | 14-Gauge                            |
| Spindles                          | Steel                           |                           | Aluminum                            |
| Mower Deck Lift                   | Mechanical, Single Lever        |                           |                                     |
| <b>Features</b>                   |                                 |                           |                                     |
| Cruise Control                    | No                              |                           | Yes                                 |
| Headlights                        | No                              |                           | LED                                 |
| Hour Meter                        | No                              |                           | Yes                                 |
| Cup Holder                        | No                              |                           | Yes                                 |
| Fuel Level Indicator              | No                              |                           | Sight                               |
| Front Bumper                      | No                              |                           | Yes                                 |
| <b>Dimensions</b>                 |                                 |                           |                                     |
| Length x Width x Height (Inches)  | 66 x 32 x 40                    | 66 x 37 x 40              | 74 x 55 x 45                        |
| <b>Limited Warranty**</b>         |                                 |                           |                                     |
| Residential                       | 3-year                          |                           |                                     |
| Commercial                        | 90-day                          |                           |                                     |
| Fabricated Mower Deck             | N/A                             |                           |                                     |

\*All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

\*\*See operator's manual or www.snapper.com for complete warranty details. Length of engine warranty coverage varies by manufacturer.



# Tractor Specifications

| Model                               | SPX™ 23/46<br>2691557               | SPX™ 25/42<br>2691663            | SPX™ 25/48<br>2691664                             |
|-------------------------------------|-------------------------------------|----------------------------------|---|
| <b>Engine</b>                       |                                     |                                  |   |
| Brand                               | Briggs & Stratton Intek™ V-Twin OHV |                                  | Briggs & Stratton Professional Series™ V-Twin OHV |
| Power Rating / Cylinders            | 23 / 2                              |                                  | 25 / 2  |
| Engine Displacement (cc)            | 724                                 |                                  |   |
| Choke / Throttle                    | Choke-a-Matic                       |                                  |   |
| Start Type                          | Key                                 |                                  |   |
| Engine Features                     | Spin-On Oil Filter                  |                                  |   |
| Fuel Tank Capacity (U.S. Gallons)   | 3.5                                 |                                  |   |
| 12V Battery (cca)                   | 230                                 |                                  |   |
| <b>Transmission</b>                 |                                     |                                  |   |
| Transmission Make                   | Tuff-Torq® K46                      |                                  |   |
| Differential                        | Hydro                               |                                  |   |
| Speed Control Design                | Foot Pedals                         |                                  |   |
| Speed- Fwd / Rev. (mph)             | 0 - 5.5 / 0 - 3.3                   |                                  |   |
| Brake                               | Disc                                |                                  |   |
| <b>Chassis</b>                      |                                     |                                  |   |
| Frame                               | 12-Gauge Steel                      |                                  |   |
| Front Axle                          | Cast-Iron                           |                                  |   |
| Turning Radius (Inches)             | 14                                  |                                  |   |
| Front Tires (Inches)                | 15 x 6                              |                                  |   |
| Rear Tires (Inches)                 | 20 x 8                              | 20 x 10                          |   |
| Number of Anti-Scalp Wheels         | 4                                   |                                  |   |
| Seat                                | 15" Mid-Back, Adjustable            | Premium 15" Mid-Back, Adjustable | 15" Contoured Mid-Back, Adjustable                |
| Steering                            | Soft Grip, Wheel                    |                                  |   |
| <b>Mower Deck</b>                   |                                     |                                  |   |
| Deck Type                           | Stamped Steel                       | Fabricated Steel                 |   |
| Cutting Width (Inches)              | 46                                  | 42                               | 48  |
| Mower Configuration                 | Side Discharge                      |                                  |   |
| Number of Blades                    | 3                                   | 2                                | 3   |
| Height-of-Cut Range (Inches)        | 1.5 - 4                             |                                  |   |
| Height-of-Cut Positions             | 7                                   |                                  |   |
| Blade Engagement                    | Electric                            |                                  |   |
| Deck Suspension                     | Frame Hung                          |                                  |   |
| Deck Thickness                      | 14-Gauge                            | 12-Gauge                         |   |
| Spindles                            | Aluminum                            |                                  |   |
| Mower Deck Lift                     | Mechanical, Single Lever            |                                  |   |
| <b>Features</b>                     |                                     |                                  |   |
| Cruise Control                      | Yes                                 |                                  |   |
| Cargo Bed <sup>†</sup>              | N/A                                 |                                  |   |
| Roll Over Protection System (ROPS)  | N/A                                 |                                  |   |
| Rear Hitch Kit                      | N/A                                 |                                  |   |
| Headlights                          | LED                                 |                                  |   |
| Hour Meter                          | Yes                                 |                                  |   |
| Cup Holder                          | Yes                                 |                                  |   |
| Fuel Level Indicator                | Sight                               |                                  |   |
| Front Bumper                        | Yes                                 |                                  |   |
| <b>Dimensions</b>                   |                                     |                                  |   |
| Length x Width x Height (Inches)    | 71 x 59 x 45                        | 74 x 53 x 46                     | 74 x 59 x 46                                      |
| <b>Limited Warranty<sup>†</sup></b> |                                     |                                  |   |
| Residential / Commercial            | 3-year / 90-day                     |                                  |   |
| Fabricated Mower Deck               | N/A                                 | Limited Lifetime                 |   |

\*All powerlevels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

\*\*All powerlevels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

# Zero Turn Specifications



| 360Z - 19/36<br>2691499                    | 360Z - 18/36<br>2691521     | 360Z - 23/46<br>2691500                           | 360Z - 21.5/42<br>2691652   |
|--|-----------------------------|---|-----------------------------|
| Briggs & Stratton Professional Series™ OHV | Kawasaki® FR600V V-Twin OHV | Briggs & Stratton Professional Series™ V-Twin OHV | Kawasaki® FR651V V-Twin OHV |
| 19' / 1                                    | 18" / 2                     | 23' / 2   | 21.5" / 2                   |
| 500  | 603                         | 724   | 726                         |
| Choke-a-Matic                              | Separate Controls           | ReadyStart®                                       | Separate Controls           |
| Key  |                             |   |                             |
| Spin-On Oil Filter                         |                             |   |                             |
| 3.0  |                             |   |                             |
| 230  |                             |   |                             |
| Hydro-Gear® EZT®                           |                             |   |                             |
| Hydro                                      |                             |   |                             |
| N/A  |                             |   |                             |
| 0-6 / 0-3                                  |                             | 0-7 / 0-4   |                             |
| Integrated                                 |                             |   |                             |
| 12-Gauge Welded                            |                             |   |                             |
| Welded Steel, Fixed                        |                             |   |                             |
| N/A  |                             |   |                             |
| 11 x 4                                     |                             | 11 x 6-5  |                             |
| 18 x 6.5                                   | 18 x 8.5                    |   | 20 x 8                      |
| None                                       |                             | 1 Front, 1 Rear                                   |                             |
| 15" Mid-Back, Adjustable                   |                             | 15" Mid-Back Cut & Sew, Adjustable                |                             |
| Twin-Lever                                 |                             |   |                             |
| Fabricated Steel                           |                             | Stamped Steel                                     |                             |
| 36   |                             | 46  |                             |
| Side Discharge                             |                             |   |                             |
| 2  |                             | 3   |                             |
| 1.5 - 4.5                                  |                             |   |                             |
| 7  |                             | 13  |                             |
| Electric                                   |                             |   |                             |
| Frame Hung                                 |                             |   |                             |
| 12-Gauge                                   |                             | 14-Gauge  |                             |
| Aluminum                                   |                             |   |                             |
| Mechanical, Foot Operated                  |                             |   |                             |
| N/A  |                             |   |                             |
| No   |                             | Optional  |                             |
| Optional                                   |                             | Standard  |                             |
| N/A  |                             |   |                             |
| Yes  |                             |   |                             |
| Yes  |                             |   |                             |
| No   |                             |   |                             |
| N/A  |                             |   |                             |
| 66 x 50 x 42                               | 70 x 50 x 42                | 70 x 56 x 42                                      | 72 x 55 x 42                |
| 3-year / 90-day                            |                             |   |                             |
| Limited Lifetime                           |                             | N/A   |                             |
| Limited Lifetime                           |                             | Limited Lifetime                                  |                             |

†See operator's manual or www.snapper.com for complete warranty details. Length of engine coverage varies by manufacturer.

‡50 lb. capacity (360Z) or 100 lb. (560Z), do not overload; do not carry passengers. Available on select models. See operator's manual for details.



# Zero Turn Specifications

| Model                              | 360Z - 23/42<br>2691651                           | 360Z - 23/48<br>2691653                           | 360Z - 21.5/48<br>2691654  | 360Z - 25/52<br>2691655                           | 360Z - 21.5/52<br>2691656  |
|------------------------------------|---|---|----------------------------|---|----------------------------|
| <b>Engine</b>                      |   |   |                            |   |                            |
| Brand                              | Briggs & Stratton Professional Series™ V-Twin OHV | Briggs & Stratton Professional Series™ V-Twin OHV | Kawasaki® FR651VV-Twin OHV | Briggs & Stratton Professional Series™ V-Twin OHV | Kawasaki® FR651VV-Twin OHV |
| Power Rating / Cylinders           | 23' / 2   | 23' / 2   | 21.5** / 2                 | 25* / 2   | 21.5** / 2                 |
| Engine Displacement (cc)           | 724   |   | 726                        | 724   | 726                        |
| Choke / Throttle                   | ReadyStart®                                       |   | Separate Controls          | ReadyStart®                                       | Separate Controls          |
| Start Type                         | Key   |   |                            |   |                            |
| Engine Features                    | Spin-On Oil Filter                                |   |                            |   |                            |
| Fuel Tank Capacity (U.S. Gallons)  | 3.0   |   |                            |   |                            |
| 12V Battery (cca)                  | 230   |   |                            |   |                            |
| <b>Transaxles</b>                  |   |   |                            |   |                            |
| Make                               | Hydro-Gear® EZT®                                  |   |                            | Hydro-Gear® ZT-2800®                              |                            |
| Differential                       | Hydro   |   |                            |   |                            |
| Speed- Fwd / Rev. (mph)            | 0-7 / 0-4   |   |                            | 0-8 / 0-4   |                            |
| Brake                              | Integrated  |   |                            |   |                            |
| <b>Chassis</b>                     |   |   |                            |   |                            |
| Frame                              | 12-Gauge Welded                                   |   |                            |   |                            |
| Front Axle                         | Welded Steel, Fixed                               |   |                            |   |                            |
| Front Tires (Inches)               | 11 x 6-5  |   |                            |   |                            |
| Rear Tires (Inches)                | 20 x 8  |   |                            | 20 x 10   |                            |
| Number of Anti-Scalp Wheels        | 1 Front, 1 Rear                                   |   | 2 Front                    |   |                            |
| Seat                               | Premium 15" Mid-Back, Adjustable                  |   |                            | Premium 15" Mid-Back with Arm Rests, Adjustable   |                            |
| Steering                           | Twin-Lever  |   |                            |   |                            |
| <b>Mower Deck</b>                  |   |   |                            |   |                            |
| Deck Type                          | Fabricated Steel                                  |   |                            |   |                            |
| Cutting Width (Inches)             | 42  | 48  |                            | 52  |                            |
| Mower Configuration                | Side Discharge                                    |   |                            |   |                            |
| Number of Blades                   | 2   | 3   |                            |   |                            |
| Height-of-Cut Range (Inches)       | 1.5 - 4.5   |   |                            |   |                            |
| Height-of-Cut Positions            | 13  |   |                            |   |                            |
| Blade Engagement                   | Electric  |   |                            |   |                            |
| Deck Suspension                    | Frame Hung  |   |                            |   |                            |
| Deck Thickness                     | 12-Gauge  |   |                            |   | 10-Gauge                   |
| Spindle                            | Aluminum  |   |                            |   |                            |
| Mower Deck Lift                    | Mechanical, Foot Operated                         |   |                            |   |                            |
| <b>Features</b>                    |   |   |                            |   |                            |
| Cargo Bed*                         | Optional  | Yes   |                            |   |                            |
| Roll Over Protection System (ROPS) | No  |   |                            |   |                            |
| Rear Hitch Kit                     | Standard  |   |                            |   |                            |
| Hour Meter                         | Yes   |   |                            |   |                            |
| Cup Holder                         | Yes   |   |                            |   |                            |
| Fuel Level Indicator               | No  |   |                            | Yes   |                            |
| <b>Dimensions</b>                  |   |   |                            |   |                            |
| Length x Width x Height (Inches)   | 72 x 55 x 42                                      | 72 x 59 x 42                                      |                            | 72 x 65 x 43                                      |                            |
| <b>Limited Warranty†</b>           |   |   |                            |   |                            |
| Residential                        | 3-year  |   |                            |   |                            |
| Commercial                         | 90-day  |   |                            |   |                            |
| Fabricated Mower Deck              | Limited Lifetime                                  |   |                            |   |                            |

# Zero Turn Specifications



## S40

## S50xt

## S120

| Model  | 5901738   | 5901739            | 5901609   | 5901611             | 5901610              | 5901612             | 5901865   | 5901868      | 5901867            | 5901862            |
|--|---|--------------------|---|---------------------|----------------------|---------------------|---|--------------|--------------------|--------------------|
| <b>Engine</b>                                    |   |                    |   |                     |                      |                     |   |              |                    |                    |
| <b>Make</b>                                      | Kawasaki®   | Briggs & Stratton® | Kawasaki®   |                     | Briggs & Stratton®   |                     | Kawasaki®   | Kawasaki®    | Briggs & Stratton® | Briggs & Stratton® |
| <b>Model</b>                                     | FR651V  | Commercial Series  | FX600V  |                     | Commercial Series    |                     | FR730   | FR730        | Commercial Series  | Commercial Series  |
| <b>Power Rating (hp)</b>                         | 21.5**  | 25*                | 19**  |                     | 25*                  |                     | 24**  | 24**         | 25*                | 25*                |
| <b>Displacement (cc)</b>                         | 726   | 724                | 603   |                     | 724                  |                     | 726   |              | 724                |                    |
| <b>Cylinders</b>                                 | 2   |                    | 2   |                     |                      |                     | 2   |              |                    |                    |
| <b>Oil Guard™ System</b>                         | N/A   |                    | N/A   |                     |                      |                     | N/A   |              |                    |                    |
| <b>Total Fuel Capacity</b>                       | 5.5 gallons   |                    | 8 gallons   |                     | 4 gallons            | 8 gallons           | 5.5 gallons   |              |                    |                    |
| <b>Mower</b>                                     |   |                    |   |                     |                      |                     |   |              |                    |                    |
| <b>Cutting Width (in.)</b>                       | 48  |                    | 36  | 48                  | 36                   | 48                  | 52  | 61           | 52                 | 61                 |
| <b>Cutting Height (in.)</b>                      | 1.5 - 4.5   |                    | 1.5 - 4.5   |                     |                      |                     | 1.5 - 5   |              |                    |                    |
| <b>Deck Construction</b>                         | 10-gauge, fabricated  |                    | 10-gauge, fabricated  | iCD™ Cutting System | 10-gauge, fabricated | iCD™ Cutting System | iCD™ Cutting System   |              |                    |                    |
| <b>Greaseable Spindles</b>                       | Cast-aluminum   |                    | Cast-aluminum   |                     |                      |                     | Cast-aluminum   |              |                    |                    |
| <b>Drive System</b>                              |   |                    |   |                     |                      |                     |   |              |                    |                    |
| <b>Transaxles</b>                                | Hydro-Gear® ZT-2800® with 7" cooling fans   |                    | Hydro-Gear® ZT-3100® with 7" cooling fans   |                     |                      |                     | Hydro-Gear® ZT-3200® with 7" cooling fans   |              |                    |                    |
| <b>Drive Axles (in.)</b>                         | 1   |                    | 1   |                     |                      |                     | 1.125   |              |                    |                    |
| <b>Drive Tires (in.)</b>                         | 20 x 10-10  |                    | 20 x 7-10   | 20 x 10-10          | 20 x 7-10            | 20 x 10-10          | 22 x 11-10  |              |                    |                    |
| <b>Caster Tires (in.)</b>                        | 11 x 6-5 Pneumatic  |                    | 11 x 4-5 Pneumatic  |                     |                      |                     | 13 x 6.5-6 Pneumatic  |              |                    |                    |
| <b>Ground Speed</b>                              |   |                    |   |                     |                      |                     |   |              |                    |                    |
| <b>Forward (mph)</b>                             | 0-8   |                    | 0-7   |                     |                      |                     | 0-10  |              |                    |                    |
| <b>Reverse (mph)</b>                             | 0-4   |                    | 0-4   |                     |                      |                     | 0-5   |              |                    |                    |
| <b>Dimensions</b>                                |   |                    |   |                     |                      |                     |   |              |                    |                    |
| <b>Overall Length (in.)</b>                      | 69.75   |                    | 73  |                     |                      |                     | 80  |              |                    |                    |
| <b>Overall Width (in.) (deflector down / up)</b> | 58.5 / 53   |                    | 49.5 / 40.5   | 64 / 49             | 49.5 / 40.5          | 64 / 49             | 66.75 / 56.5  | 75.75 / 65.5 | 66.75 / 56.5       | 75.75 / 65.5       |
| <b>Dry Weight (lbs.)</b>                         | 721   |                    | 732   | 768                 | 732                  | 768                 | 987   | 1080         | 987                | 1080               |
| <b>Operator Control &amp; Comfort Systems</b>    |   |                    |   |                     |                      |                     |   |              |                    |                    |
| <b>Seat Package</b>                              | Mid-back with armrests  |                    | Mid-back with armrests  |                     |                      |                     | Mid-back with armrests  |              |                    |                    |
| <b>ROPS</b>                                      | N/A   |                    | N/A   |                     |                      |                     | Standard  |              |                    |                    |
| <b>Instrumentation</b>                           | Hour meter, fuel level gauge  |                    | Hour meter, fuel level gauge  |                     |                      |                     | Hour meter, fuel level gauge  |              |                    |                    |
| <b>Safety Group / Controls</b>                   | Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls                                     |                    | Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls |                     |                      |                     | Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls |              |                    |                    |
| <b>Parking Brake</b>                             | Internal transaxle  |                    | Internal transaxle  |                     |                      |                     | Internal transaxle  |              |                    |                    |
| <b>Warranty</b>                                  |   |                    |   |                     |                      |                     |   |              |                    |                    |
| <b>Engine**</b>                                  | 3-Year limited manufacturer's warranty  |                    |   |                     |                      |                     |   |              |                    |                    |
| <b>Balance of Machine**</b>                      | 4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months). Belts, tires, battery, blades: 90 days. |                    |   |                     |                      |                     |   |              |                    |                    |

\* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

\*\* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details. Length of engine coverage varies by manufacturer.

‡ 50 lb. capacity (360Z) or 100 lb. (560Z), do not overload; do not carry passengers. Available on select models. See operator's manual for details.

†† Refer to engine operator's manual for engine warranty details.

††† See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details.

## S200xt

| Model   | 5901664   | 5901280            | 5901665                                  | 5901666        | 5901667        |
|---|---|--------------------|--|----------------|----------------|
| <b>Engine</b>                                 |   |                    |  |                |                |
| Make  | Kawasaki®   | Briggs & Stratton® | Vanguard®                                | Vanguard®      | Vanguard®      |
| Model   | FX801V  | Commercial Series  | 810 EFI                                  | BIG BLOCK™ EFI | BIG BLOCK™ EFI |
| Power Rating (hp)                             | 25.5**  | 27*                | 28*                                      | 37*            | 37*            |
| Displacement (cc)                             | 852   | 810                | 810                                      | 993            | 993            |
| Cylinders                                     | 2   |                    |  |                |                |
| Oil Guard™ System                             | N/A   |                    | Standard                                 |                |                |
| Total Fuel Capacity                           | 10 gallons  | 5 gallons          | 10 gallons                               |                |                |
| <b>Mower</b>                                  |   |                    |  |                |                |
| Cutting Width (in.)                           | 61  |                    |  |                | 72             |
| Cutting Height (in.)                          | 1.5 - 5   |                    |  |                |                |
| Deck Construction                             | iCD™ Cutting System   |                    |  |                |                |
| Greaseable Spindles                           | Cast-iron   |                    |  |                | Hercules™ II   |
| <b>Drive System</b>                           |   |                    |  |                |                |
| Transaxles                                    | Hydro-Gear® ZT-5400 Powertrain® with 9" cooling fans  |                    |  |                |                |
| Drive Axles (in.)                             | 1.375   |                    |  |                |                |
| Drive Tires (in.)                             | 24 x 12-12  |                    |  |                |                |
| Caster Tires (in.)                            | 13 x 6.5-6  |                    |  |                |                |
| <b>Ground Speed</b>                           |   |                    |  |                |                |
| Forward (mph)                                 | 0-10  |                    |  |                |                |
| Reverse (mph)                                 | 0-5   |                    |  |                |                |
| <b>Dimensions</b>                             |   |                    |  |                |                |
| Overall Length (in.)                          | 80  |                    |  |                | 83.5           |
| Overall Width (in.)<br>(deflector down / up)  | 87.5  |                    |  |                | 74             |
| Dry Weight (lbs.)                             | 1190  |                    |  |                | 1439           |
| <b>Operator Control &amp; Comfort Systems</b> |   |                    |  |                |                |
| Seat Package                                  | Premium adjustable with armrests  |                    | Adjustable suspension seat with armrests |                |                |
| ROPS  | 165° foldable   |                    |  |                |                |
| Controls                                      | N/A   |                    |  |                |                |
| Instrumentation                               | Hour meter, fuel level gauge  |                    |  |                |                |
| Safety Group / Controls                       | Seat actuated engine kill, blade, clutch safety switch, neutral and parking brake safety circuit / adjustable twin steering controls  |                    |  |                |                |
| Parking Brake                                 | Internal transaxle  |                    |  |                |                |
| <b>Warranty</b>                               |   |                    |  |                |                |
| Engine†                                       | 3-Year limited manufacturer's warranty  |                    |  |                |                |
| Balance of Machine‡                           | 4-Year limited warranty (48 months) or 500 hours, whichever occurs first.<br>Unlimited hours during the first 2 years (24 months).<br>3-Year limited warranty (36 months) or 300 hours, whichever occurs first on the 2-belt decks.<br>Warranty parts & labor in first year and parts only in remaining years. (excludes 5901280)<br>Belts, tires, battery, blades: 90 days. (5901280 only) |                    |  |                |                |

# SS100

# SS200

| 5901801  | 5901800   | 5901802   | 5901803 |
|--|-----------|---|---------|
| Vanguard®  | Kawasaki® | Vanguard®   |         |
| V-Twin OHV   | FX600V    | 810cc EFI   |         |
| 23"  | 19"       | 28"   |         |
| 627  | 603       | 810   |         |
| 2  |           | 2   |         |
| N/A  |           | Standard  |         |
| 6 gallons  |           | 8 gallons   |         |
| 36   | 48        | 52  | 61      |
| 1.75 - 5   |           | 1.75 - 5  |         |
| 10-gauge, fabricated   |           | iCD™ cutting system   |         |
| Cast-aluminum  |           | Cast-aluminum   |         |
| Hydro-Gear® ZT-3400®<br>with 7" cooling fans   |           | Hydro-Gear® ZT-3800®<br>with oil cooling system   |         |
| 1.125  |           | 1.125   |         |
| 23 x 8.5 - 12  |           | 23 x 10.5 - 12  |         |
| 11 x 4 - 5 Flat-free   |           | 13 x 5-6, Flat-free   |         |
| 0-8  |           | 0-10  |         |
| 0-4  |           | 0-5   |         |
| 65   |           | 67  | 72      |
| 49 / 42  | 59.5 / 54 | 65 / 54   | 77 / 64 |
| 813  | 866       | 938   | 998     |
| N/A  |           | N/A   |         |
| N/A  |           | N/A   |         |
| 3-Speed Control Setting  |           | 3-Speed Control Setting   |         |
| Hour meter, fuel level gauge   |           | Hour meter, fuel level gauge  |         |
| Integrated forward & reverse control levers with stabilizer bars,<br>Automatic PTO disengagement |           | Operator presence in platform, Parking brake safety circuit for starting engine,<br>Automatic PTO restart |         |
| Internal transaxle   |           | Internal Transaxle  |         |
| <b>3-Year limited manufacturer's warranty</b>  |           |   |         |

4-Year limited warranty (48 months) or 500 hours, whichever occurs first. Unlimited hours during the first 2 years (24 months).  
Coil-over-shocks and all suspension related components are covered for 5 years (60 months) unlimited hours. Transaxles are covered for 3 years (36 months).  
Coverage on other components varies, please see operator's manual for complete details.

\* All power levels are stated gross horsepower at 3600 RPM per SAE J1940 as rated by Briggs & Stratton.

\*\* All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

\*\*\* Power rated by engine manufacturer.

<sup>1</sup> Refer to engine operator's manual for engine warranty details.

<sup>2</sup> See operator's manual or [www.snapper.com](http://www.snapper.com) for complete warranty details.



**Easy to Use. Easy to Own.**

**SNAPPER.COM**   

Get your digital edition now!

 Text DIGITAL to 33988  
for a digital copy of this  
brochure.

Data rates apply. Go to [www.snapper.com](http://www.snapper.com) for terms and privacy information.



Be careful fueling your small gasoline engines in your mowers. Fuel with ethanol can cause damage to your engine including poor starting, rough running, rust, corrosion and in some cases failure.

For more information visit:  
[www.LookBeforeYouPump.com](http://www.LookBeforeYouPump.com)

Briggs & Stratton Corporation has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice. Products may vary from images shown.

Briggs & Stratton: All power levels are stated gross horsepower at 3600 rpm per SAE J1940.

Kawasaki: Only Kawasaki Critical Power engines listed in this brochure have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, horsepower-rated in accordance with SAE J2723, and certified by SAE International. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

**BRIGGS & STRATTON CORPORATION**  
MILWAUKEE, WI 53201-0702 USA  
(414) 259-5333  
Copyright ©2020. All rights reserved.

200004